


STARLITE[®]

FRP Pressure Vessels



www.purencure.com

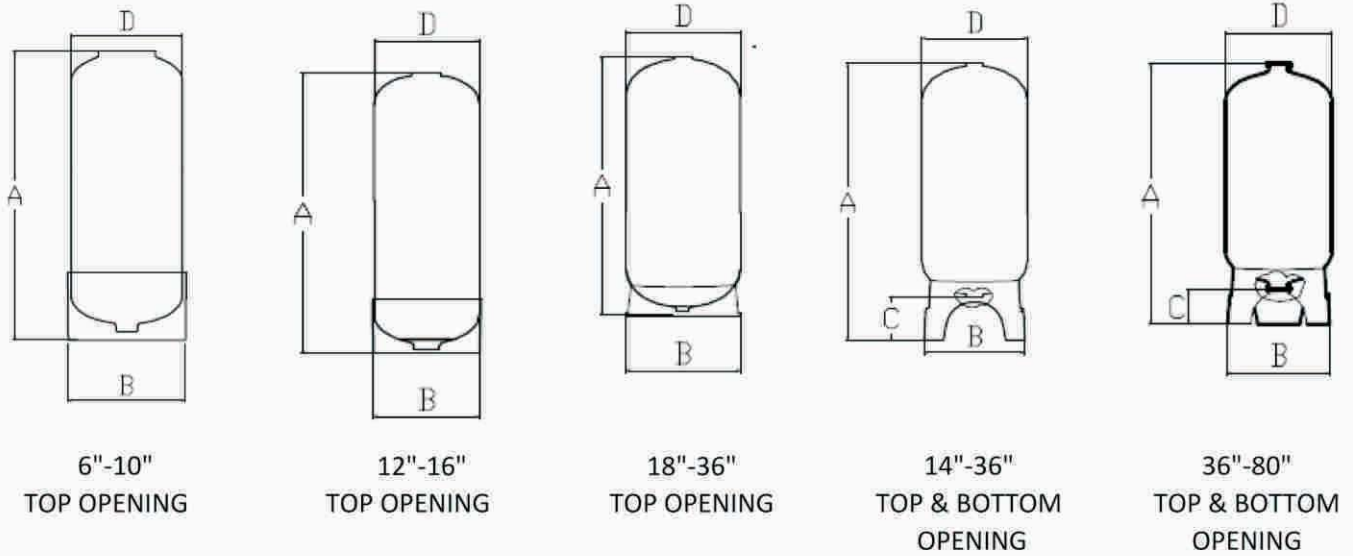

OPERATING PARAMETERS

OPERATING TEMPERATURE - 40°C (MAX)
COLOUR OPTIONS - NATURAL,BLUE

| MODEL | OPENING CONNECTION | | APPROXIMATE CAPACITY | BASE | A | B | C | D |
|-------|--------------------|-------------|----------------------|----------|------|------|------|------|
| | TOP OPEN | BOTTOM OPEN | LITERS | | (MM) | (MM) | (MM) | (MM) |
| 613 | 2.5" | - | 4.6 | Standard | 337 | 165 | | 155 |
| 617 | 2.5" | - | 6.6 | Standard | 440 | 165 | | 155 |
| 635 | 2.5" | - | 13.7 | Standard | 918 | 165 | | 155 |
| 735 | 2.5" | - | 20.1 | Standard | 895 | 197 | | 182 |
| 744 | 2.5" | - | 25.6 | Standard | 1125 | 197 | | 182 |
| 817 | 2.5" | - | 10.9 | Standard | 434 | 216 | | 210 |
| 835 | 2.5" | - | 25 | Standard | 900 | 216 | | 210 |
| 844 | 2.5" | - | 32.1 | Standard | 1022 | 216 | | 210 |
| 1054 | 2.5" | - | 63.3 | Standard | 1387 | 269 | | 260 |
| 1252 | 2.5" | - | 97 | Standard | 1330 | 318 | | 310 |
| 1354 | 2.5" | - | 105.3 | Standard | 1382 | 343 | | 336 |
| 1465 | 2.5" | - | 148.5 | Standard | 1655 | 369 | | 362 |
| 1465 | 4" | 4" | 148.5 | Tripod | 1900 | | 225 | 362 |
| 1665 | 2.5" | - | 192 | Standard | 1660 | 422 | | 412 |
| 1665 | 4" | 4" | 192 | Tripod | 1900 | | 225 | 412 |
| 1865 | 4" | - | 268 | Standard | 1715 | 451 | | 465 |
| 1865 | 4" | 4" | 268 | Tripod | 1950 | | 265 | 465 |
| 2162 | 4" | 4" | 341 | Tripod | 1905 | | 300 | 543 |
| 2472 | 4" | 4" | 490 | Tripod | 2090 | | 280 | 622 |
| 3072 | 4" | 4" | 735 | Tripod | 2070 | | 280 | 775 |
| 3672 | 4" | 4" | 1031 | Tripod | 2085 | | 365 | 934 |
| 4272 | 6" Flange | 6" Flange | 1461 | Tripod | 2270 | | 280 | 1096 |
| 4872 | 6" Flange | 6" Flange | 1890 | Tripod | 2300 | | 280 | 1246 |
| 6079 | 6" Flange | 6" Flange | 3000 | Tripod | 2440 | | 250 | 1500 |
| 6386 | 6" Flange | 6" Flange | 3326 | Tripod | 2500 | | 280 | 1633 |
| 7279 | 6" Flange | 6" Flange | 4577 | Tripod | 2560 | | 250 | 1800 |
| 8079 | 6" Flange | 6" Flange | 5074 | Tripod | 2480 | | 250 | 2000 |

NOTE : SPECIFICATIONS ARE APPROXIMATE & NOT TO SCALE. INDIVIDUAL TANK SIZE & CAPACITY MAY VARY. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT ANY PRIOR NOTICE.